


Materials, Supplies, & Cutting Diagram No. 153

Bead Board Chest


| | | | |
|---------------------------------|--|-------------------------|---|
| A Box Sides (2) | $\frac{1}{2}$ ply. - 16 x 39 $\frac{1}{2}$ | K Box Cap (1) | $\frac{1}{4}$ x 1 $\frac{1}{4}$ - 120 rgh. |
| B Box Ends (2) | $\frac{1}{2}$ ply. - 16 x 13 | L Bead Trim (1) | $\frac{1}{4}$ x $\frac{3}{4}$ - 384 rgh. |
| C Box Bottom (1) | $\frac{1}{2}$ ply. - 13 x 39 | M Bead Board (1) | $\frac{5}{16}$ x 3 $\frac{5}{8}$ - 288 rgh. |
| D Side Corner Stiles (4) | $\frac{3}{4}$ x 2 - 17 $\frac{1}{4}$ | N Top (1) | 1 x 16 $\frac{1}{2}$ - 42 $\frac{1}{2}$ |
| E End Corner Stiles (4) | $\frac{3}{4}$ x 1 $\frac{3}{4}$ - 17 $\frac{1}{4}$ | O Cleats (3) | 1 x 2 - 12 $\frac{1}{2}$ |
| F Top Side Rails (2) | $\frac{3}{4}$ x 2 $\frac{3}{8}$ - 37 | | |
| G Bottom Side Rails (2) | $\frac{3}{4}$ x 4 $\frac{3}{4}$ - 37 | | |
| H Top End Rails (2) | $\frac{3}{4}$ x 2 $\frac{3}{8}$ - 11 | | |
| I Bottom End Rails (2) | $\frac{3}{4}$ x 4 $\frac{3}{4}$ - 11 | | |
| J Side Dividers (4) | $\frac{3}{4}$ x 2 - 8 $\frac{7}{8}$ | | |

- (30) #8 x 1" Fh Woodscrews
- (18) #8 x 1 $\frac{1}{2}$ " Fh Woodscrews
- 1" Brads
- $\frac{5}{8}$ " Brads

$\frac{1}{2}$ " - 48" x 96" Birch Plywood

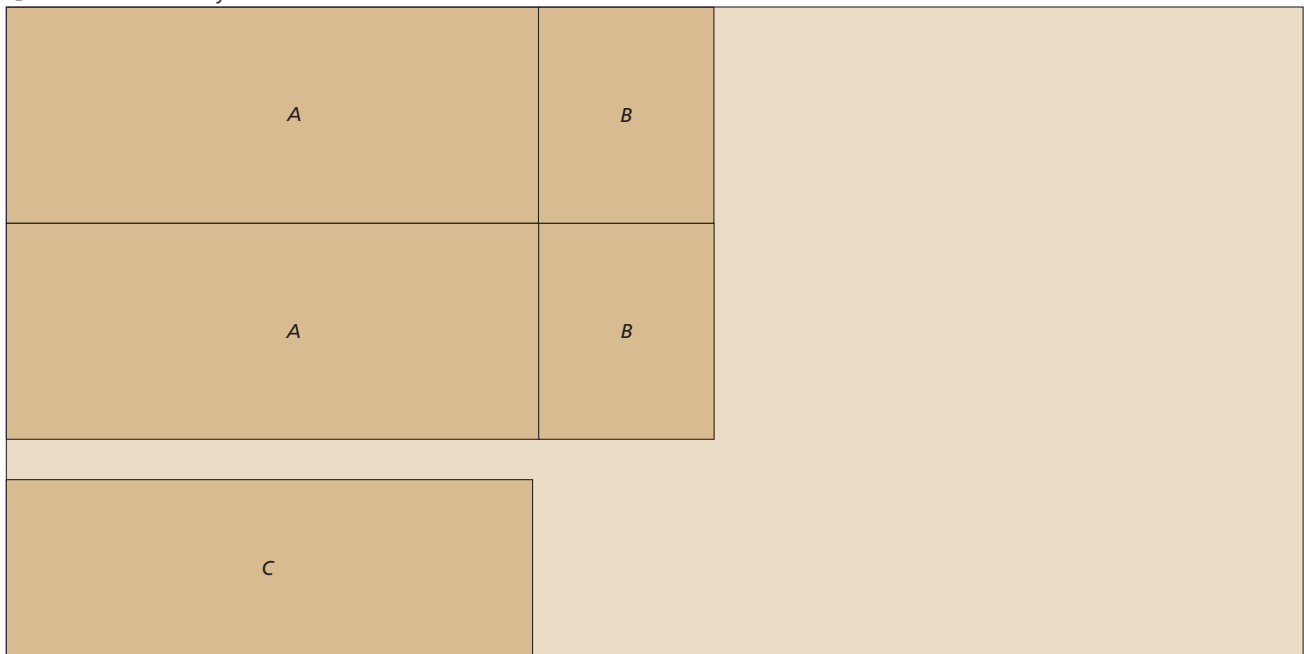

$\frac{3}{4}$ " x 9" - 96" Poplar (6 Bd. Ft.)

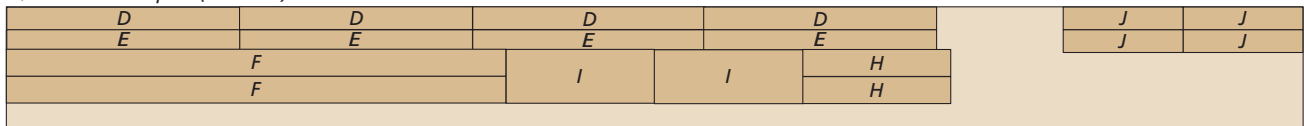

$\frac{3}{4}$ " x 9" - 96" Poplar (6 Bd. Ft.)



1" x 6" - 96" Pine (5 Bd. Ft.)



1" x 6" - 72" Pine (3.8 Bd. Ft.)



NOTE: Purchase pre-made bead board from home improvement center